




Loading instruction referring to the positioning of the belts/straps at a charge of 8,00 – 12,50 m tubes

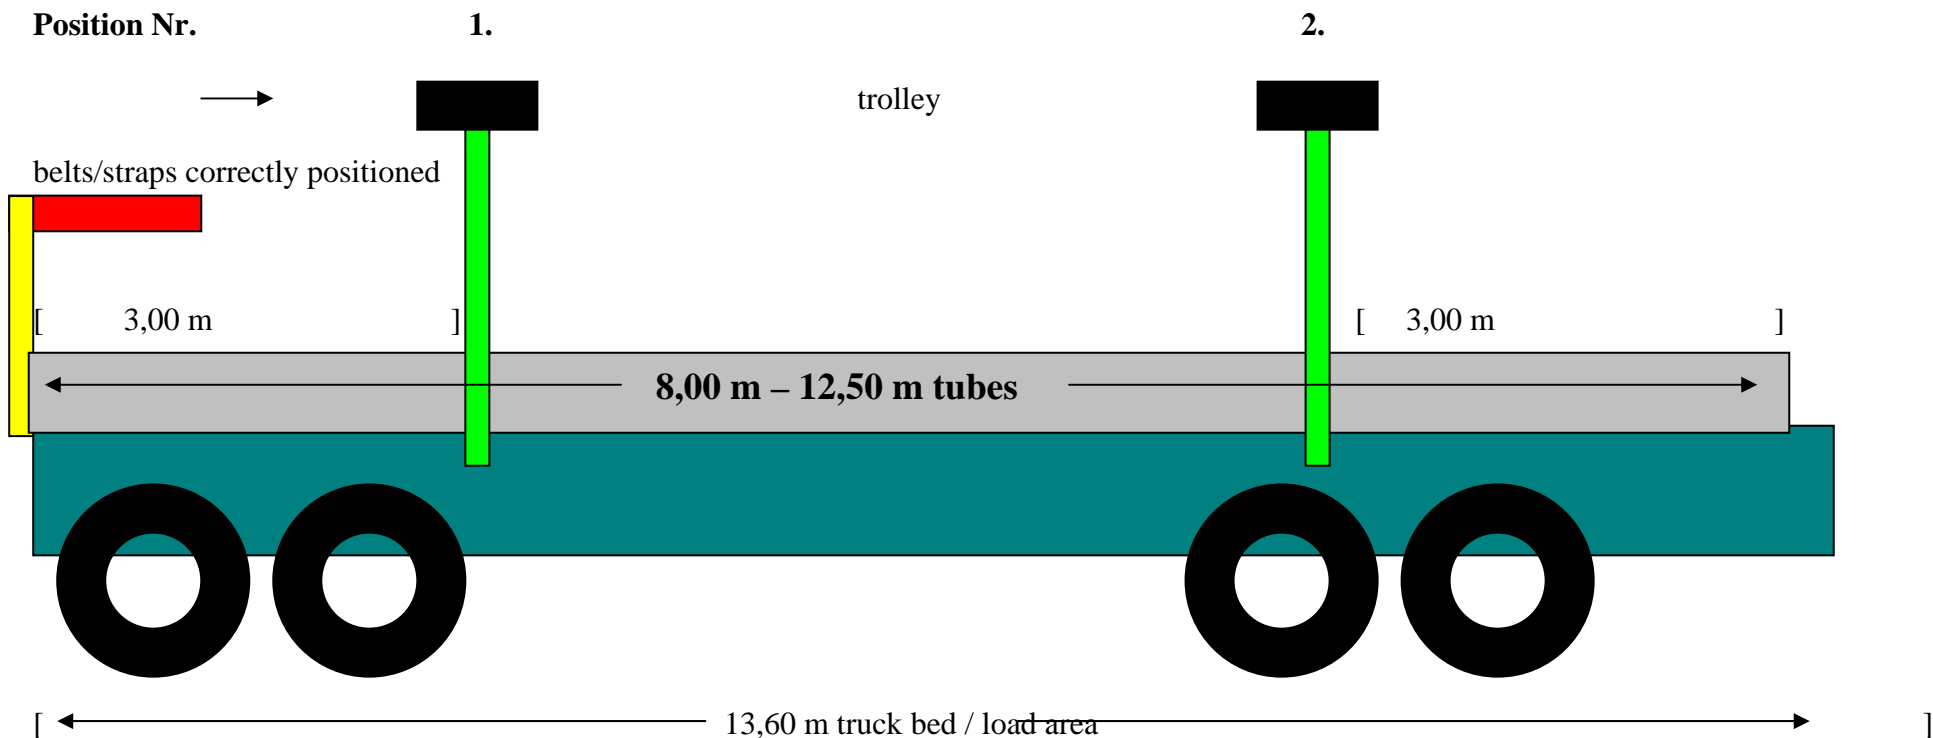

In order for a proper crane unloading, straps must be positioned 3 mtrs. from each end of each bundle (see green presentation). Because of the deferred tarpaulin of the truck it is not permitted to position the straps less than 2,40 mtrs. from the end of the bundle.

Necessarily comply to this loading instruction. If you do not comply to this loading instruction the discharge of the truck can not be guaranteed!!!