




Loading instruction referring to the positioning of the belts/straps at a charge of 6,00 – 8,00 m tubes

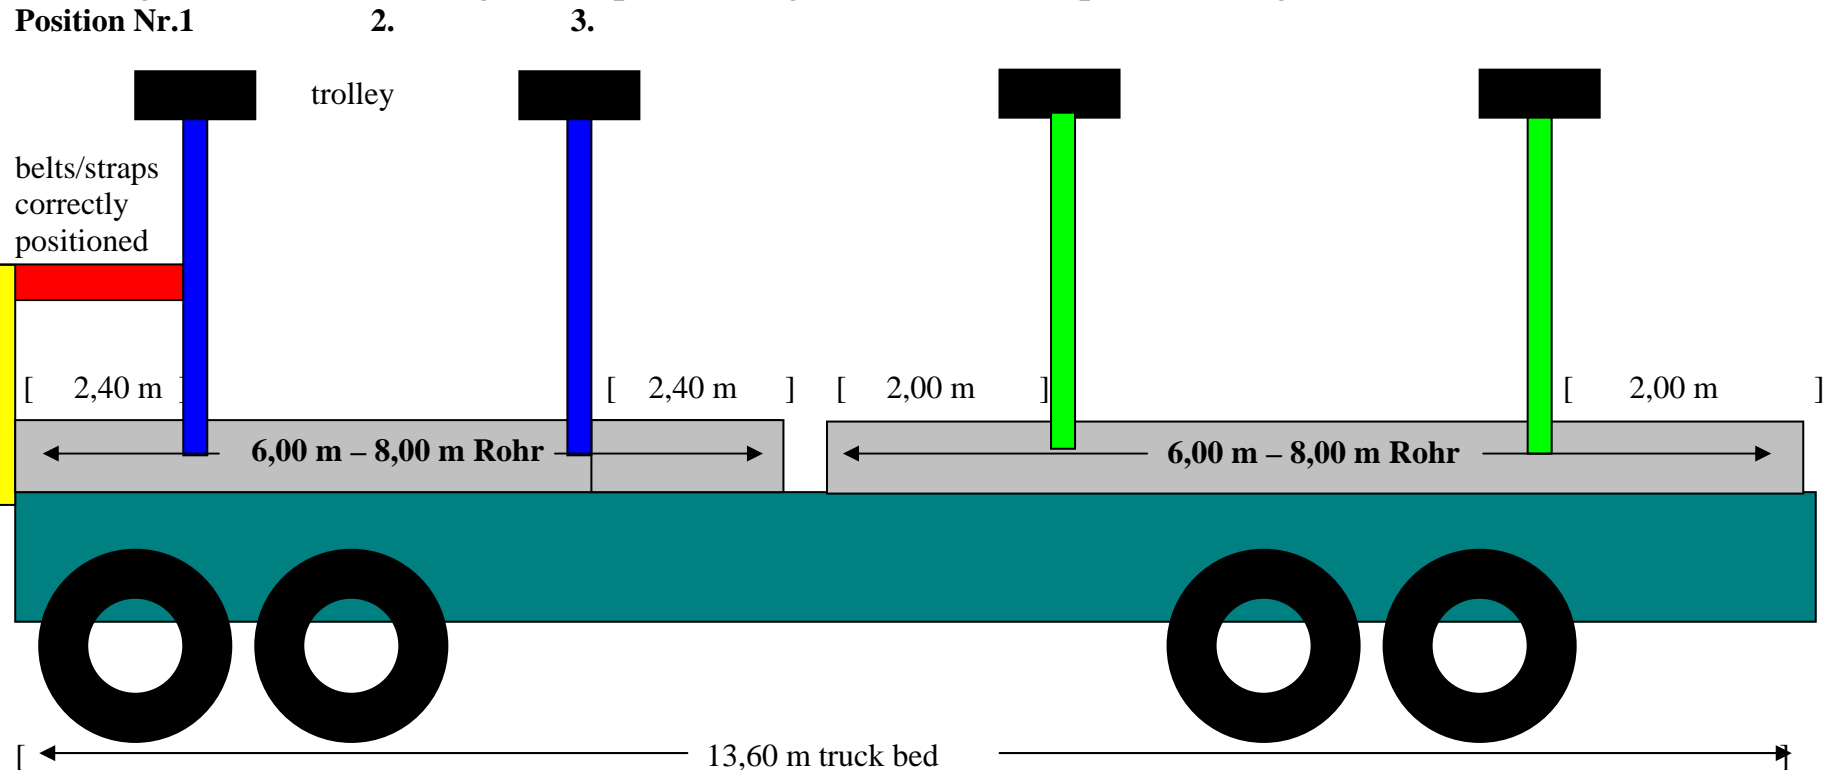

During unloading the roof/hood of the truck will be pushed together to at least 2,40 mtrs. toward the front wall (see red bar  ; front wall yellow  ). For a correct and safe unloading process the belts/straps must be positioned 2,40 mtrs. away from the end of the bundle. See blue presentation of the ropes  . The straps of the stack behind that needs to be 2,00 mtrs. away from the end of the bundle (see green presentation of the ropes  )

**Necessarily comply to this loading instruction. If you do not comply to this loading instruction the discharge of the truck can not be guaranteed !!!**